

Brake Caliper DH 005 PFK

pneumatically activated – spring released



Features


Features	Code
Brake Caliper	D
Mounting to the machine at right angles to the brake disc	H
Frame size 005	005
Pneumatically activated	P
Spring released	F
No adjustment to accommodate friction block wear	K
Pressure piston 605	605
Pressure piston mounted in central position	M
Thickness of brake disc 6 mm	06

Example for ordering


Brake Caliper DH 005 PFK, pressure piston 605, pressure piston mounted in central position, thickness of brake disc 6 mm:

DH 005 PFK - 605 M - 06

Technical Data

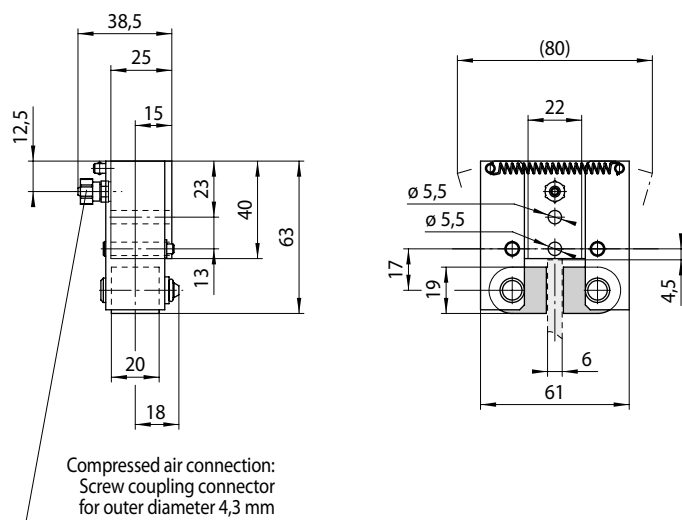

Values in brackets resulting with maximum friction block wear.

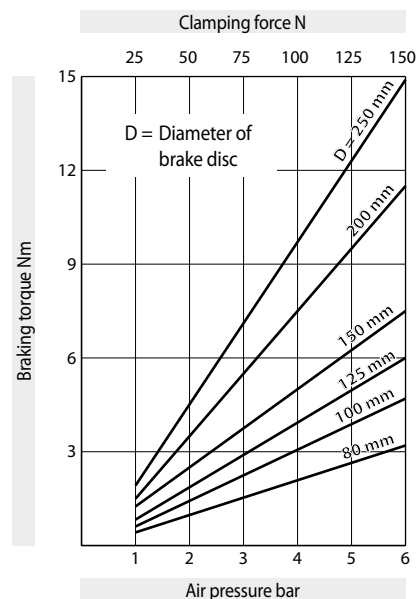

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Air pressure: max. 6 bar

Air volume: max. 3 cm³ per activation

Weight: 0,4 kg

49-1

49-2