


Brake Caliper HW 075 HFK

hydraulically activated – spring released

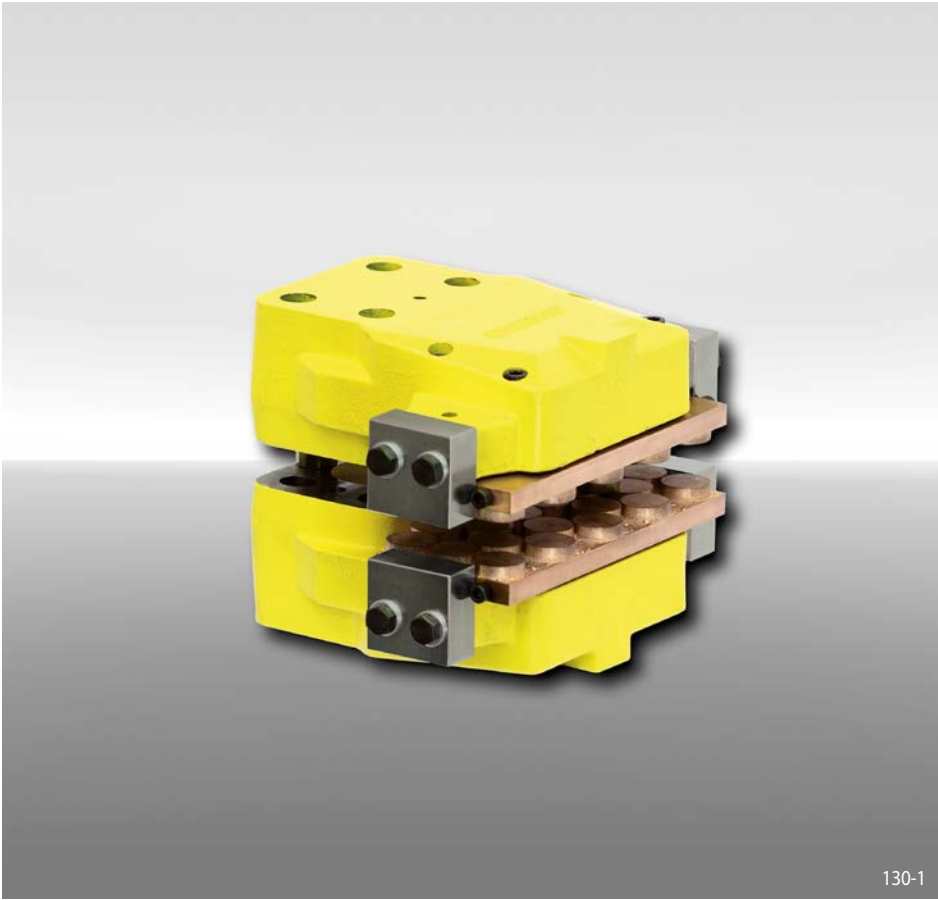


Features	Code
Brake Caliper	H
Standard	W
Frame size 075	075
Hydraulically activated	H
Spring released	F
No adjustment to accommodate friction block wear	K
Max. clamping force 55 kN	055

Example for ordering

Brake Caliper HW 075 HFK, max. clamping force 55 kN:

HW 075 HFK - 055

Technical Data

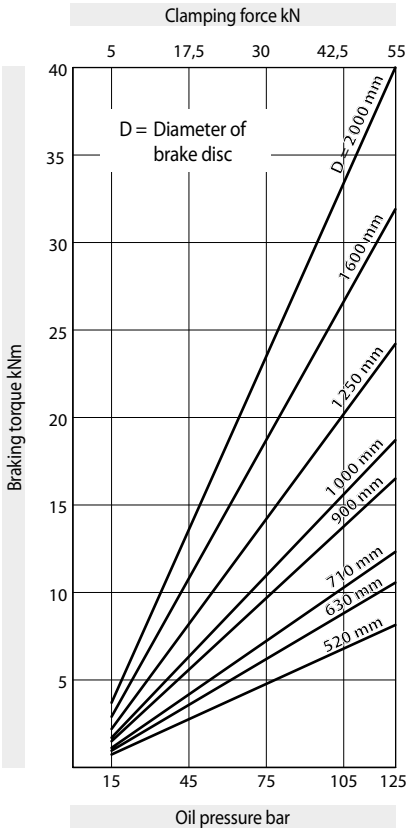

Oil pressure: min. 15 bar
max. 125 bar

Oil volume: max. 75 cm³

Weight: ca. 60 kg

Other features

- High safety against leakage
- Easy change of friction blocks
- Painted with surface coating class C4-L according to ISO 12944
- The thickness of the customer connecting part results from the thickness of the brake disc W plus 3 mm

Accessories


- Inductive proximity switch for "brake released" operating status
- Optional painting with surface coating class C4-H or C5M-H (offshore) according to ISO 12944

The braking torques shown in the diagram are based on a theoretical friction coefficient of 0,4.

Brake Caliper HW 075 HFK

RINGSPANN®

hydraulically activated – spring released

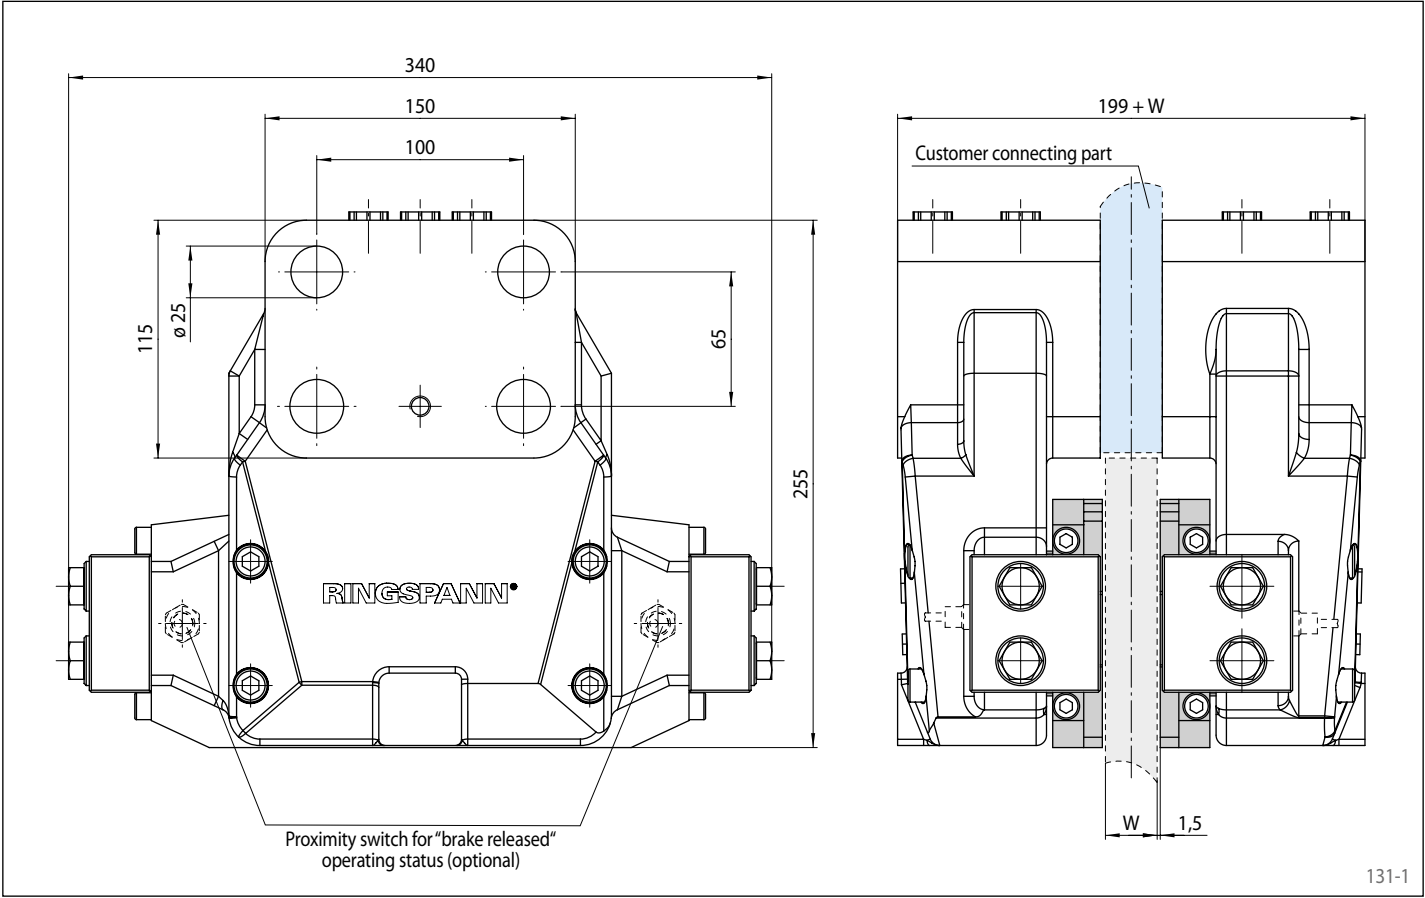

Mounting

